



APPLICATION:

The safety shower is used for flushing the body from above in case of emergency, allows you to wash harmful substances off the body. The device is made made of polished 304 stainless steel. Thanks to the use of a strong (thickness of 2 mm) shower head, there is no possibility it cracks, which often happens to plastic ones competition heads - as in the example photo below:



The set includes a safety sign with adhesives for wall mounting. It is installed inside buildings.

ACTUATING:

The device is activated by pulling down the pull rod. The valve remains open until manually closed.


SUPPLY:

The shower has a 3/4" female thread at the end of the valve. The device is supposed to be connected to cold water. Valves mixing cold and hot water can be used, but it is not required.

CERTIFICATES:

The device is certified by the National Institute of Hygiene and has a declaration of conformity confirming it compliance with the European standard PN-EN 15154-1:2006 Body showers connected to the water supply system. Copies of both documents are attached.



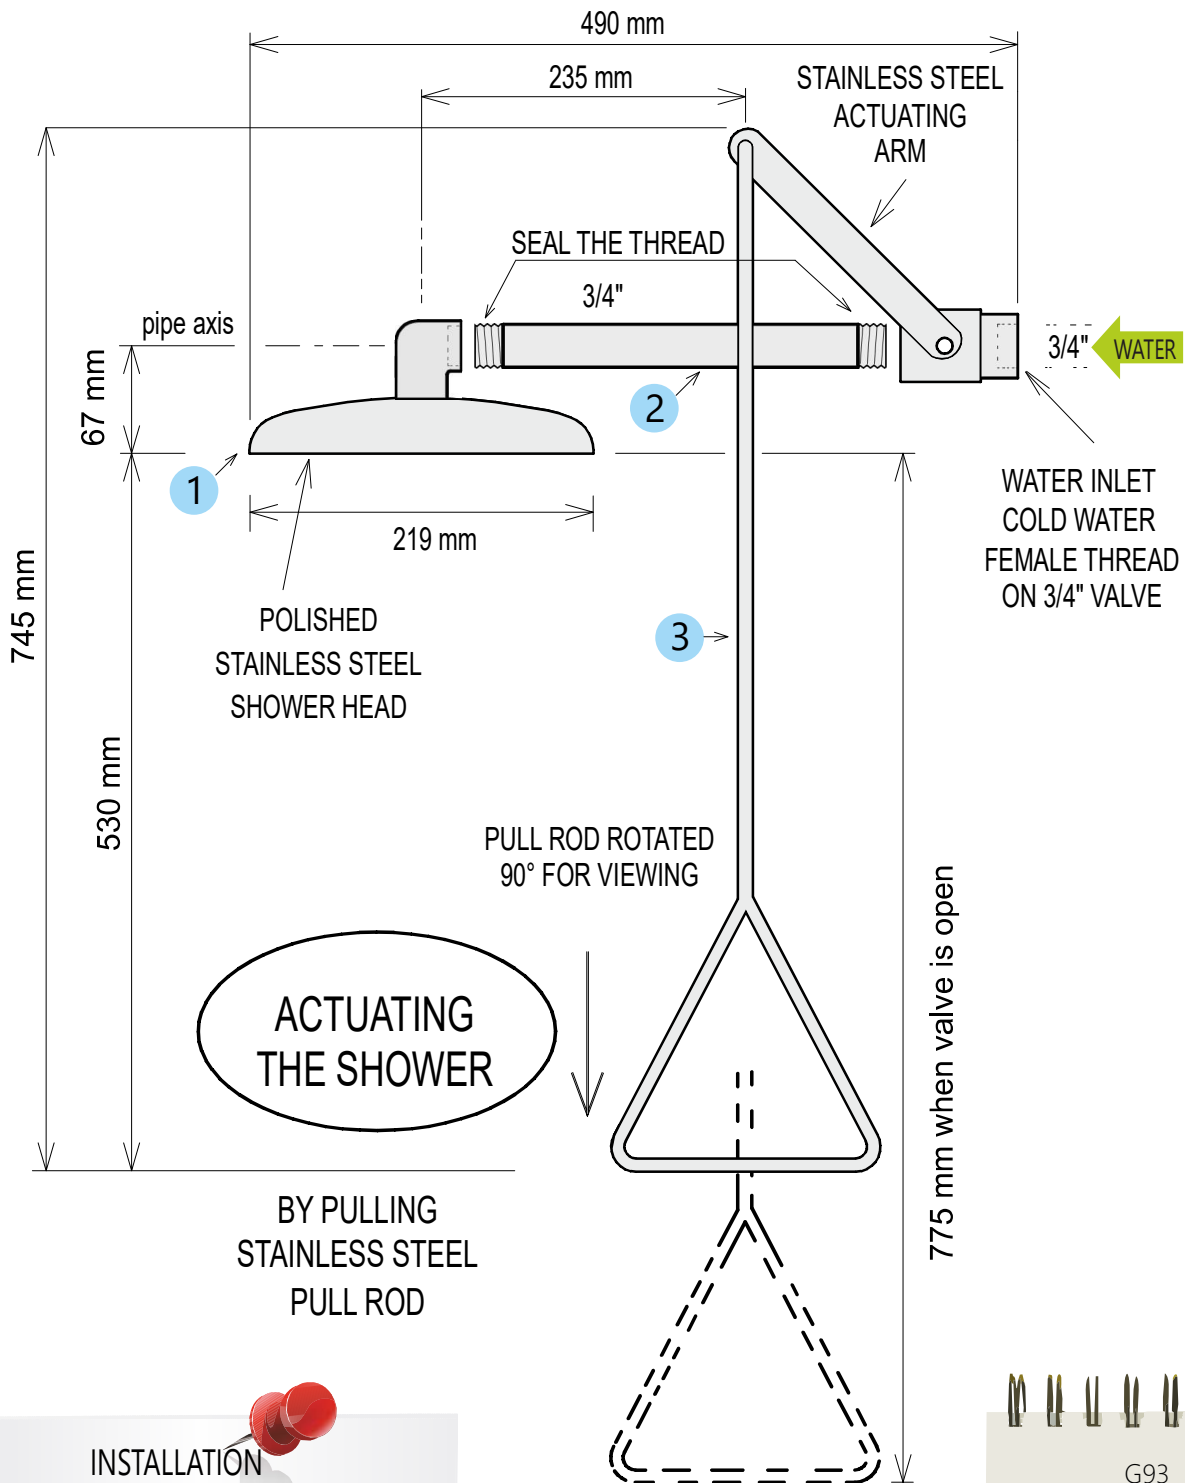

INSTALLATION

1. Check package contents.
2. Prepare thread sealing materials. e.g. tow plumbing flax and paste, in sufficient quantity to seal two 3/4" threads.
3. Mount to a horizontal threaded pipe external 3/4"
4. Attach safety sign to the wall.

G93		
number	LIST OF ELEMENTS	
1	Shower head	<input type="checkbox"/>
2	Pipe 3/4" L=300 mm	<input type="checkbox"/>
3	Valve+arm+pull rod	<input type="checkbox"/>
4	Safety sign + docs	<input type="checkbox"/>

